


Hollow Core Slab Systems

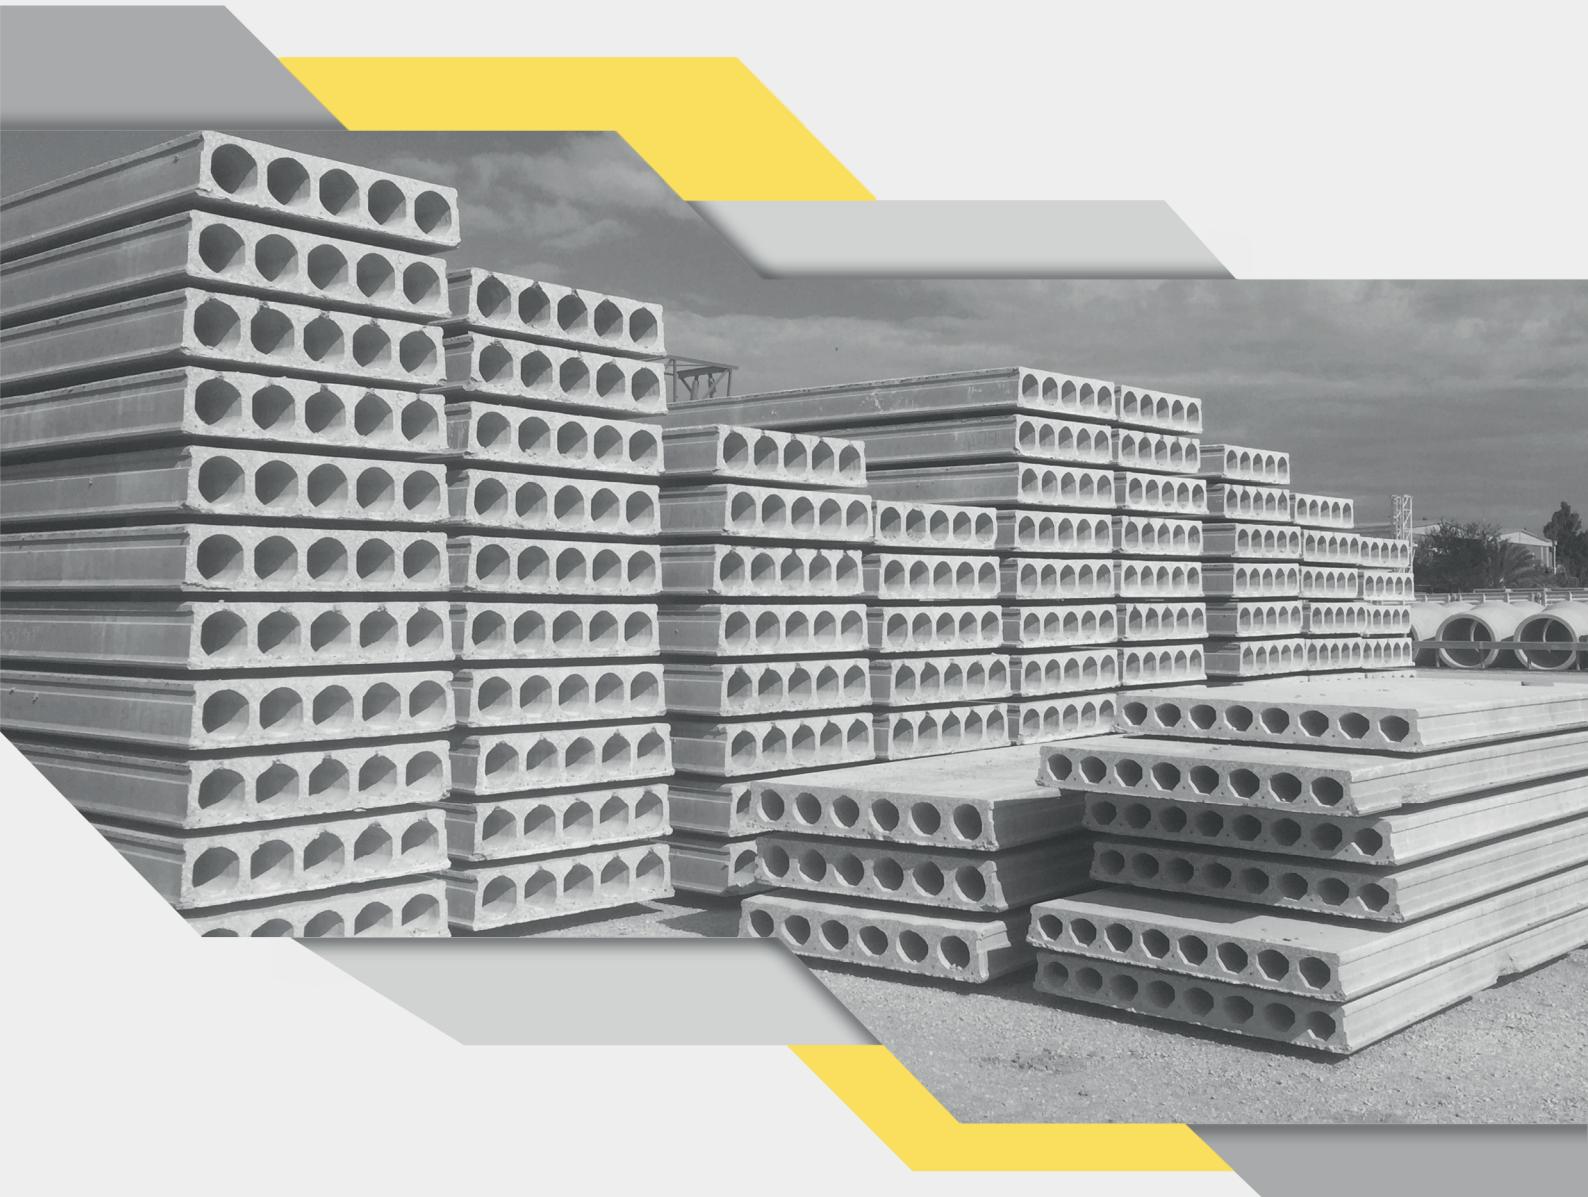



KAMBETON

Hollow core slabs are prestressed with steel strands. Strict quality controls are applied to achieve high durability.

Hollow Core Slabs are produced with a standard width of 120cm but can be cut in desired width and lengths. The bottom surface has a smooth finish and therefore no further application is needed after installation.

The longitudinal voids/cores contribute to thermal and sound insulation and can also be used as ducts for services such as electrical cables.

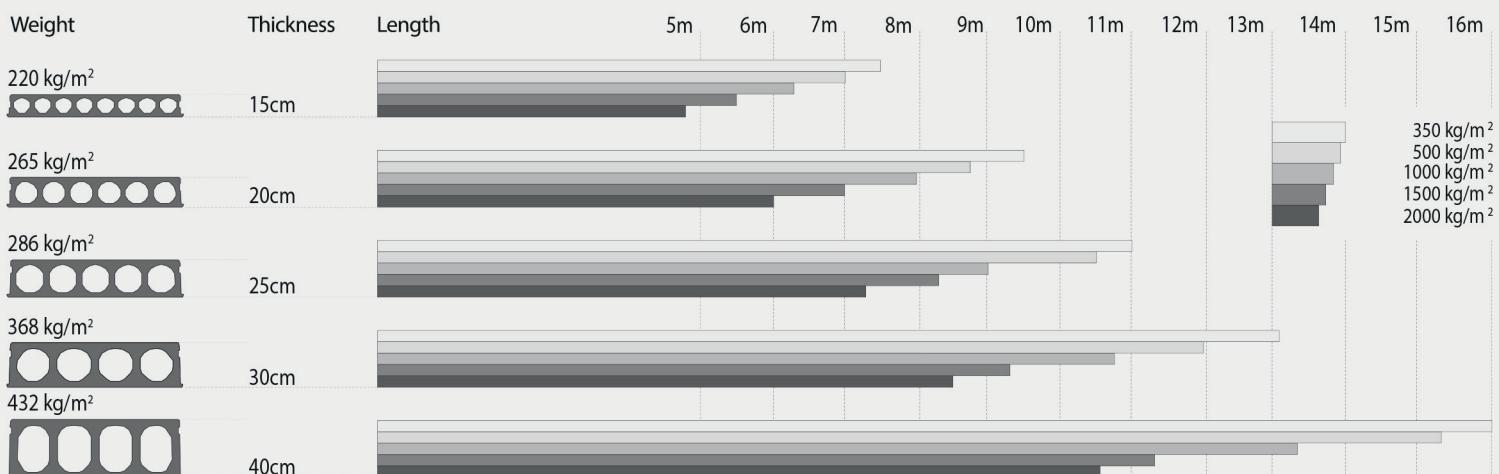

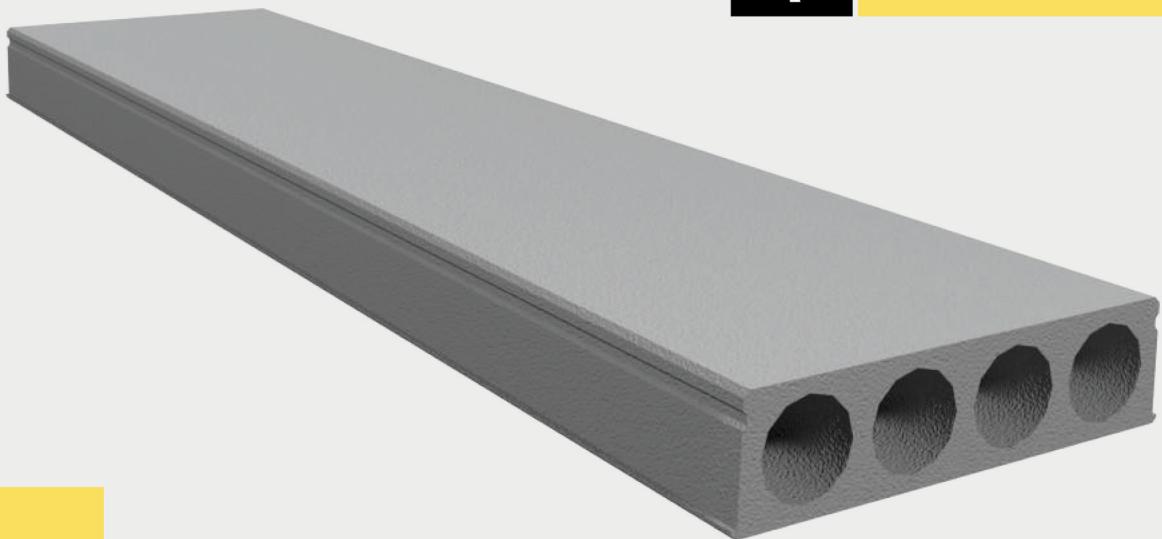

Clear,
Longer Spans

Hollow core slabs can achieve spans up to 16 meters depending on the live load. Long clear spans eliminate columns and allow for larger open areas which are crucial for retail spaces.

Economical,
Lighter Solution

The longitudinal voids within the slabs reduce self-weight, therefore lightening the load on the structure and reducing the total construction costs.

Rapid,
Safe Installation

Hollow core slabs can be installed safely and quickly without the need for scaffolding on site, shortening the overall construction time.





[/kambetonadana](#)

[/kambeton](#)

[/KambetonAS](#)



TSE K 118



Headquarters: İncirlik Cumhuriyet Mahallesi
İncirlik Bulvarı No:390 /Z-01 Yüreğir / ADANA
P: +90 322 346 00 01 | **F:** +90 322 346 00 58

Branch: Belkis Köyü Belkis Sokak No: 50 Nizip / GAZİANTEP
P: +90 342 526 11 35-36-37 | **F:** +90 342 526 1135
www.kambeton.com.tr | kambetonakambeton.com.tr



www.kambeton.com.tr